

TR-MR64R-B

64-CH SMART Series Performance NVR
with Turing Vision Bridge



Key Features

- ✓ Turing Vision cloud-ready with included Bridge Hardware
- ✓ Vision Core features - People & Vehicle Attribute Search, LPR & More
- ✓ Cloud storage of event thumbnails and video clips
- ✓ Turing SMART Series IP cameras recommended
- ✓ Third-party IP cameras supported by NVR and Vision cloud
- ✓ Remote maintenance through Turing Vision Cloud
- ✓ Local full time recording on up to 8 SATA HDD
- ✓ Two RJ45; 384 Mbps inbound throughput




SPECIFICATIONS

Video/Audio Input		Hard Disk	
IP Video Input	Up to 64 Channels	SATA	8 SATA interfaces
Two-Way Audio Input	1-Ch, RCA	Capacity	Up to 10 TB for each disk
Network		eSATA	1 eSATA interface
Incoming Bandwidth	384 Mbps	Disk Array	
Outgoing Bandwidth	384 Mbps	USB Interface	RAID 0, 1, 5, 6, 10
Remote Users	128	External Interface	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
VIDEO/AUDIO		USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	Serial Interface	1 x RS485, 1 x RS232
	HDMI1/HDMI2(HDMI audio not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50H 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	Alarm In	16-ch
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/ 720p/D1/2CIF/CIF	Alarm	4-ch
Audio Output	1-ch, RCA	GENERAL	
Synchronous Playback	16-ch	Power Supply	100 ~ 240 V AC Power Consumption: ≤25W(without HDD)
Image Rotation Mode Screen	3/4/5/7/9/10/12/16/32	Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Decoding		Dimensions	442mm x426mm x 89mm (17.4" x 16.8" 3.5")
Decoding Format	Ultra 265, H.265, H.264	Net Weight	≤5.7kg (12.57lb)
Live View Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/ 720p/D1/2CIF/CIF	COMPATIBILITY	
Decoding Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1	Recommended Turing Cameras	SMART Series
		ONVIF	Supported (S, G, T Profiles)



DIMENSIONS

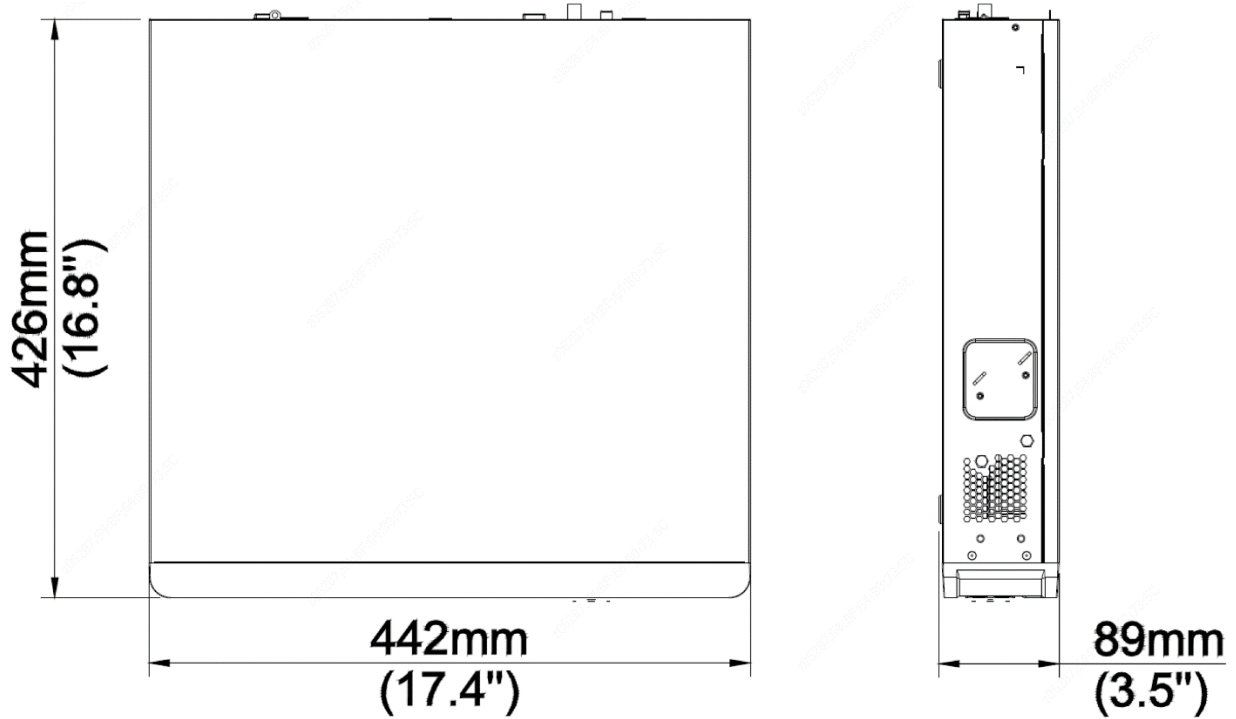

REAR PANEL

