

# TR-MRP04-B / TR-MRP042T-B

Network Video Recorder with Turing Vision Bridge



## Key Features

- ✓ Turing cloud-ready with Smart NVR series and Turing bridge
- ✓ Support Ultra265/H.265/H.264 video formats
- ✓ 4-channel Plug and Play POE input
- ✓ Support HDMI and VGA simultaneous output
- ✓ Up to 8MP input resolution
- ✓ 1 SATA HDD, up to 6 TB




## SPECIFICATIONS

Network		Hard Disk	
Incoming Bandwidth	80Mbps	SATA	1 SATA interface
Outgoing Bandwidth	64Mbps	Capacity	6 TB
Remote Users	128	Bundled HDD	TR-MRP04-B: None TR-MRP042T-B: 2TB
Protocols	P2P, UPnP, NTP, DHCP, PPPoE		
VIDEO/AUDIO		External Interface	
IP Video Input	4-ch	NETWORK INTERFACE	1 RJ45 10M/100M self-adaptive Ethernet Interface
Two-way Audio Input	1-ch, RCA	USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/ 60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	<b>PoE</b>	
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/ D1/2CIF/CIF	Interface	4 RJ-45 10M/100M self-adaptive Ethernet Interface
Audio Output	1-ch, RCA	Max Power	Max 30W for single port Max 54W total
Synchronous Playback	8-ch	Supported Standard	IEEE 802.3af/at
Corridor Mode Screen	3/4/5/7/9	<b>GENERAL</b>	
Decoding		Power Supply	48V DC Power Consumption: ≤9 W (without HDD)
Decoding Format	Ultra 265, H.265, H.264	Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Live View Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF /CIF	DIMENSIONS	260mm × 240mm × 47mm (10.2" × 9.4" × 1.9")
Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30	NET WEIGHT	1kg (2.20 lb)
		COMPATIBILITY	
		ONVIF	Profiles S/G/T
		Recommended Turing Cameras	SMART Series Only



## DIMENSIONS

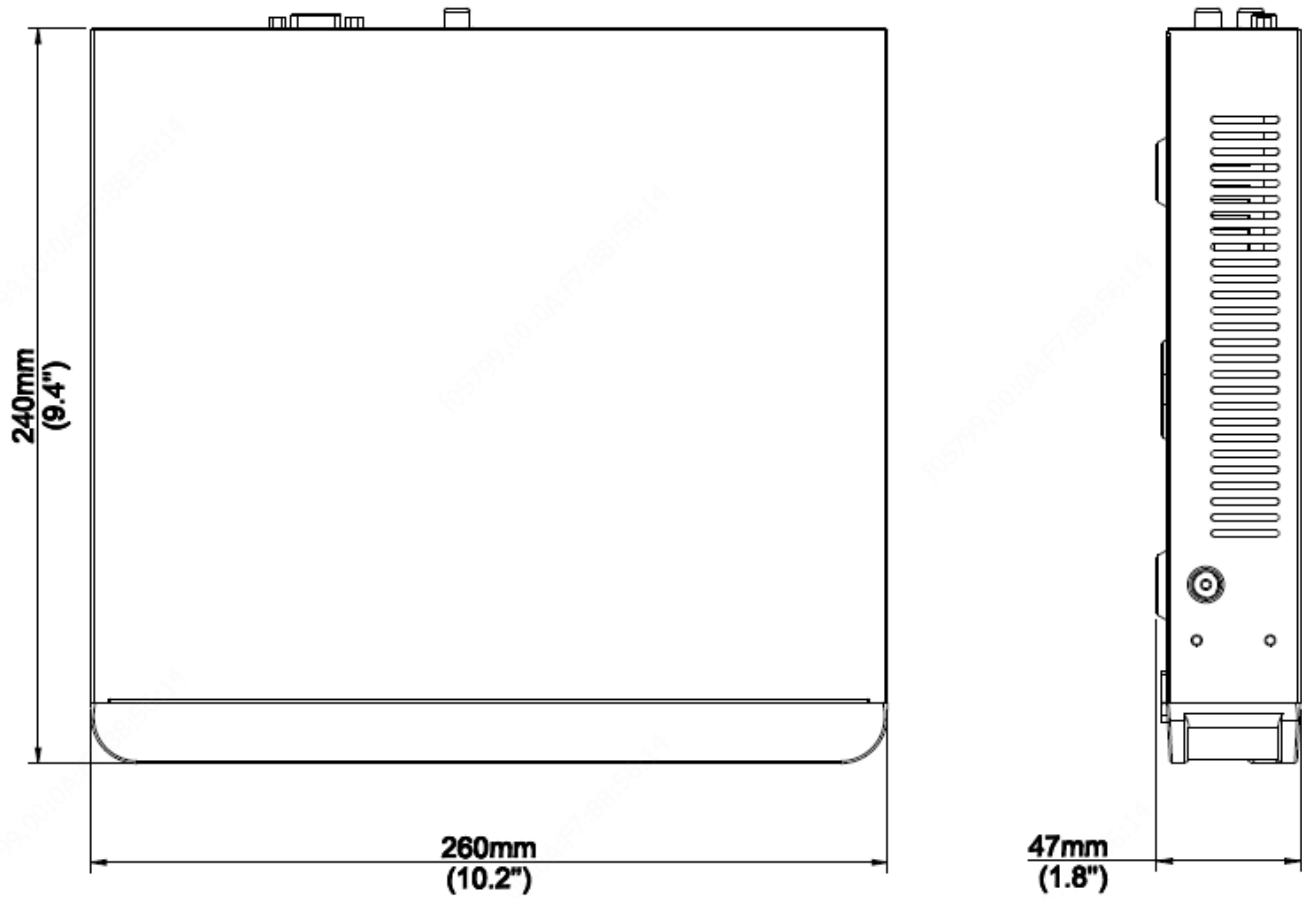

## REAR PANEL

