

# TR-MRP16-B / TR-MRP164T-B

Network Video Recorder with Turing Vision Bridge



## Key Features

- ✓ Turing cloud-ready with Smart NVR series and Turing bridge/servers
- ✓ Support Ultra265/H.265/H.264 video formats
- ✓ 16-channel Plug and Play POE input
- ✓ Support HDMI and VGA simultaneous output
- ✓ Up to 8MP input resolution
- ✓ 2 SATA HDDs, up to 10TB for each HDD




## SPECIFICATIONS

Network		Hard Disk	
Incoming Bandwidth	160Mbps	SATA	2 SATA interface
Outgoing Bandwidth	64Mbps	Capacity	Max 10TB per disk
Remote Users	128	Bundled HDD	TR-MRP16-B: None TR-MRP164T-B: 4TB
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	<b>External Interface</b>	
VIDEO/AUDIO		NETWORK INTERFACE	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
IP Video Input	16-ch	USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0
Two-way Audio Input	1-ch, RCA	Alarm In	4-ch
HDMI/VGA Output	HDMI: 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60	Alarm	1-ch
	VGA: 1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60	<b>PoE</b>	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Interface	16 RJ-45 10M/100M self-adaptive Ethernet Interface
Audio Output	1-ch, RCA	Max Power	Max 30W for single port Max 240W total
Synchronous Playback	16-ch	Supported Standard	IEEE 802.3af/at
Corridor Mode Screen	3/4/5/7/9/10/12/16	GENERAL	
Decoding		Power Supply	100 ~ 240 V AC Power Consumption: ≤10W(without HDD)
Decoding Format	Ultra 265, H.265, H.264	Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Live View Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	DIMENSIONS	380mm × 315mm × 53mm (14.9" × 12.4" × 2.1")
Capability	2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P @30, 16 x 720P@30	NET WEIGHT	≤2.6kg (5.73lb)
		COMPATIBILITY	
		ONVIF	Profiles S/G/T
		Recommended Turing Cameras	SMART Series Only



## DIMENSIONS

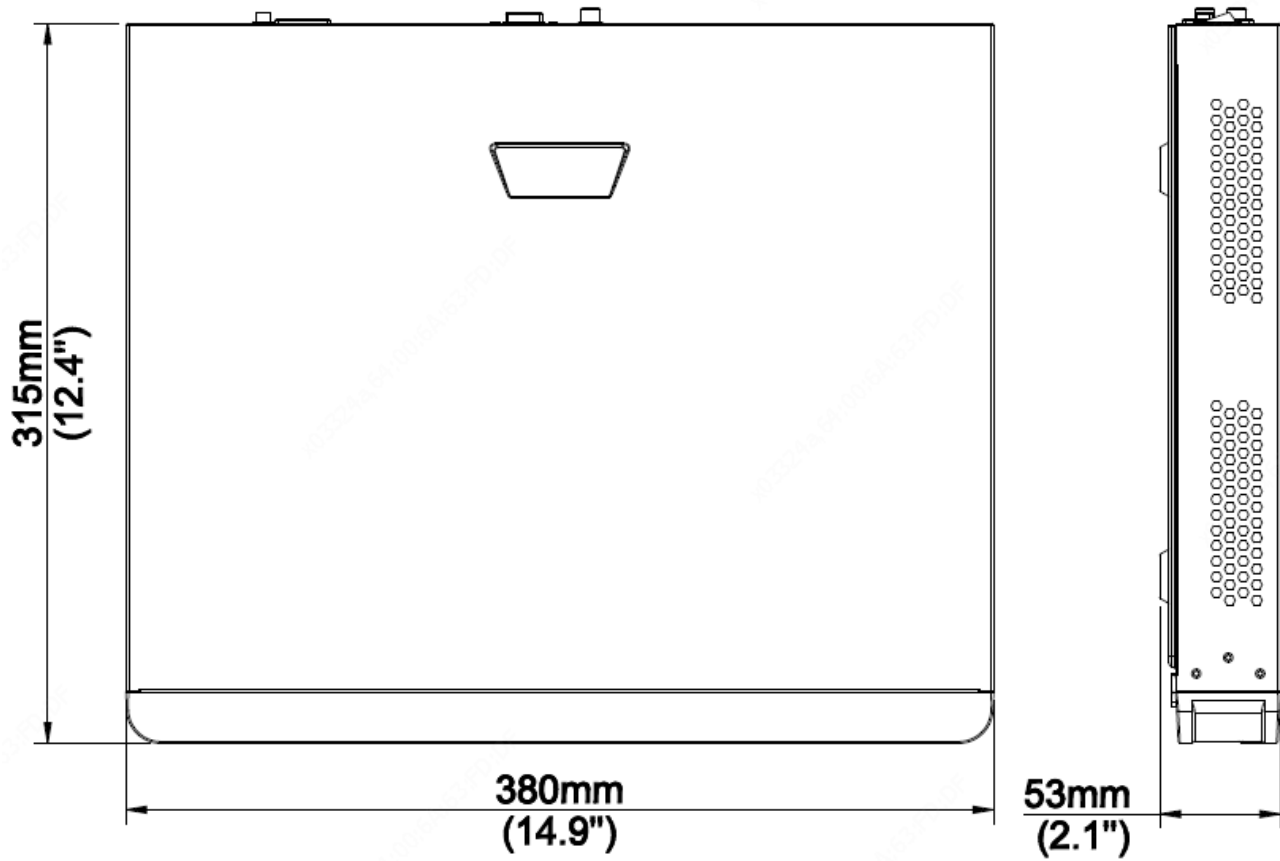

## REAR PANEL

(Example shown is TR-MRPO82T)

